

Technical datasheet

POS-L-730-1-C13299

Product description

Pos emits reliably efficient light on traffic roads and industrial areas to support safety and security outdoors. The smart function also offers a range of smart city functions.

LED

220-240V  
50-60Hz

IP66







CCT  
3000 k

CRI  
70+

CLO



Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Ripple	3 %
Connection method	Screw terminal	Inrush current	81 A
Dimming type	Non-dimmable	Inrush time	36 µs
IP rating	66	Optical system	Lenses
Protection class	I	Optical part material	Hardened glass
Ambient temperature	-40 to +50 °C	Housing material	Die-cast aluminium
Light source	LED	Surface finish	Powder coated
Colour temperature	3000k	Width	240.00 cm
Color rendering index	70	Height	109.00 cm
Rated luminous flux	12,518 lm	Length	613.00 cm
Connected load	102.56 W	Weight	5.10 kg
Luminous efficacy	122.1 lm/W	Service lifetime (L80 B10)	>100 000 h
		Warranty	7 years

Dimensions




Light distribution



Constant Light Output (CLO)

This system compensates for the depreciation of luminousflux to avoid excess lightingat the beginningof the installation's service life. Luminous depreciation over time must be taken into account to ensure a predefined lightinglevel duringthe luminaire's usefullife.

Without a CLO feature, this simply means increasingthe initial power upon installationin order tomake up for luminous depreciation. By precisely controlling the luminous flux,the energy needed to reach the required level can be maintained throughout the luminaire's life.

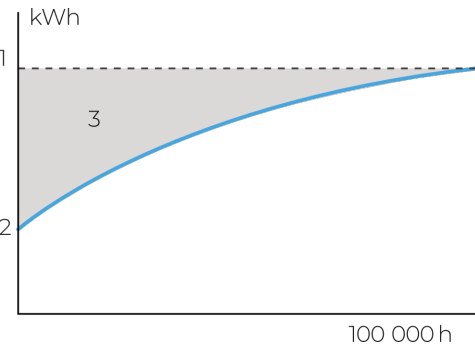


A. Dimming level  
B. Time

MidNight function

The MidNight function feature allows an autonomous dimming without the need for an additional control line. The output levels can be set to 0% (OFF) or between 10% and 100% in steps of 1%

**Time-based:** The dimming profile defined in the reference schedule is referenced to the switchon time of the LED driver.

**Astro-based:** The dimming profile defined in the reference schedule is referenced to the annual average middle of the night, which is calculated based on the theoretical sunrise and sunset times.

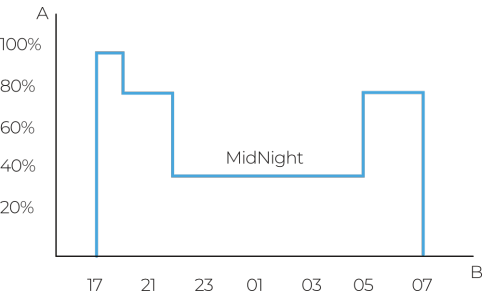

1. Standard lighting level  
2. LED lighting consumption with CLO  
3. Energy savings