

# Technical datasheet

## GEMINYM-840-1-BL-




### Product description


Geminy linear lamp is designed to create smaller atmospheres within larger spaces. The design features elegant lines and subtle details, along with copper details that complement the structure of the lamp and provide a rich material contrast to powder-coated parts, creating a modern and functional light for any space.

**LED** 220-240 V 50-60 Hz **IP20**  **CE** **CCT 4000 k** **CRI 80+**


### Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Ripple	1 %
Connection method	Plug-in terminal	Inrush current	18 A
Dimming type	Non-dimmable	Inrush time	154 μs
IP rating	20	Optical system	Diffuser
Protection class	I	Optical part material	PMMA
Ambient temperature	0 to +25 °C	Housing material	Steel
Light source	LED	Surface finish	Powder coated
Colour temperature	4000k	Width	40.00 cm
Color rendering index	80	Height	40.00 cm
Rated luminous flux	3,260 lm	Length	1,200.00 cm
Connected load	23.48 W	Weight	4.00 kg
Luminous efficacy	138.9 lm/W	Service lifetime (L80 B10)	50 000 h
		Warranty	5 years

### Dimensions

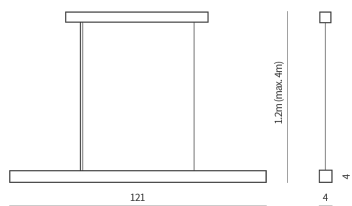

### Light distribution

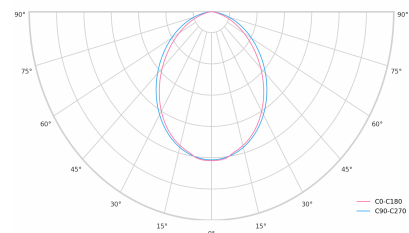

**Available cable colors**

