

# Technical datasheet

## LINESUS1696-XL-930-2-BL-DI-




### Product description


LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.

**LED** 220-240 V 50-60 Hz **IP20**  **CE** **CCT 3000 k** **CRI 90+**


### Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Ripple	1 %
Connection method	Plug-in terminal	DALI address	1
Dimming type	DALI	Standby power	0.50 W
IP rating	20	Inrush current	53 A
Protection class	I	Optical system	Diffuser
Ambient temperature	0 to +25 °C	Optical part material	PMMA
Light source	LED	Housing material	Aluminium
Colour temperature	3000k	Surface finish	Powder coated
Color rendering index	90	Width	50.00 cm
Rated luminous flux	4,396 lm	Height	70.00 cm
Connected load	58.89 W	Length	1,696.00 cm
Luminous efficacy	74.6 lm/W	Weight	4.00 kg
		Service lifetime (L80 B10)	50 000 h
		Warranty	5 years

### Dimensions

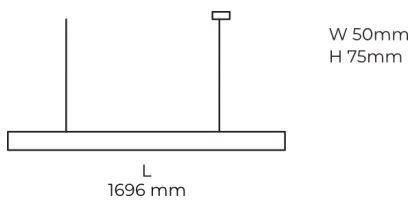

### Light distribution

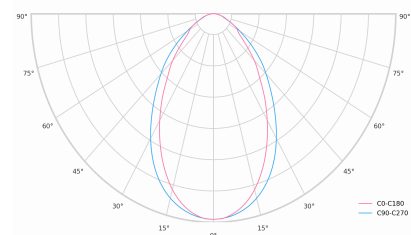

**Available cable colors**

