# Technical datasheet

LINESUS2258-XL-840-2-WH-DI/IND-



## Product description

LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.

LED 220-240V 50-60Hz IP20 CE CCT 4000 k CRI 80+

## Product technical data

| | |
|---|---|
| Mains voltage | 220 - 240V AC, 50/60Hz |
| Connection method | Plug-in terminal |
| Dimming type | DALI |
| IP rating | 20 |
| Protection class | I |
| Ambient temperature | 0 to +25 °C |
| Light source | LED |
| Colour temperature | 4000k |
| Color rendering index | 80 |
| Rated luminous flux | 7,275 lm |
| Connected load | 117.90 W |
| Luminous efficacy | 103.2 lm/W |
| Ripple | 1 % |
| DALI address | 2 |
| Standby power | 1.00 W |
| Inrush current | 71 A |
| Inrush time | 180 µs |
| Optical system | Diffuser |
| Optical part material | PMMA |
| Housing material | Aluminium |
| Surface finish | Powder coated |
| Width | 50.00 cm |
| Height | 70.00 cm |
| Length | 2,258.00 cm |
| Weight | 5.50 kg |
| Service lifetime (L80 B10) | 50 000 h |
| Warranty | 5 years |

## Dimensions




W 50mm
H 75mm

## Light distribution

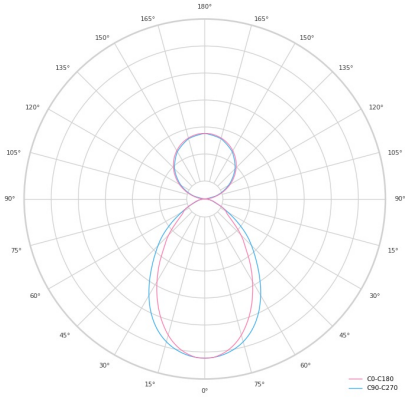


## Available cable colors

0111 0900 8765 7953 3119 4867 4906 5305 2166 4406 3358 5474 5744 1257 3119z

0900z 5305z