

# Technical datasheet

## IP65-1500-M-840-1



### Product description

Led linear luminaire for dusty environments with IP65 protection and 5 year warranty.




**LED**    220-240 V  
50-60 Hz    **IP65**            

### Product technical data

Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Plug-in terminal
Dimming type	Non-dimmable
IP rating	65
Protection class	I
Impact rating	IK 08
Ambient temperature	-20 to +40 °C
Light source	LED
Rated luminous flux	8,128 lm
Connected load	58.30 W
Luminous efficacy	139.4 lm/W

Inrush current	24 A
Inrush time	220 μs
Optical system	Diffuser
Optical part material	PC
Housing material	Plastic
Width	74.00 cm
Height	64.00 cm
Length	1,502.00 cm
Weight	1.70 kg
Service lifetime (L80 B10)	50 000 h
Warranty	5 years

### Dimensions

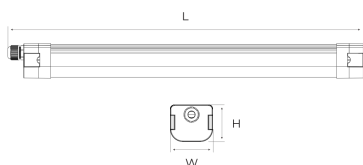

### Light distribution

