

# Technical datasheet

## Ring-L-830-2-SUS-WH-



### Product description

Ring is a circular LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser for uniform light. Available in 3 sizes, color temperatures 3000K/4000K with CRI 80+. Suspended and surface mounting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.




**LED** 220-240 V 50-60 Hz **IP20**  **CE** **CCT 3000 k** **CRI 80+**

### Product technical data


|                       |                        |
|-----------------------|------------------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz |
| Connection method     | Screw terminal         |
| Dimming type          | DALI                   |
| IP rating             | 20                     |
| Protection class      | I                      |
| Ambient temperature   | 0 to +25 °C            |
| Light source          | LED                    |
| Colour temperature    | 3000k                  |
| Color rendering index | 80                     |
| Rated luminous flux   | 6,600 lm               |
| Connected load        | 75.00 W                |
| Luminous efficacy     | 88.0 lm/W              |

|                            |             |
|----------------------------|-------------|
| Optical system             | Diffuser    |
| Optical part material      | PMMA        |
| Housing material           | Aluminium   |
| Surface finish             | Painted     |
| Height                     | 60.00 cm    |
| Diameter                   | 1,200.00 cm |
| Weight                     | 12.20 kg    |
| Service lifetime (L80 B10) | 50 000 h    |
| Warranty                   | 5 years     |

### Dimensions

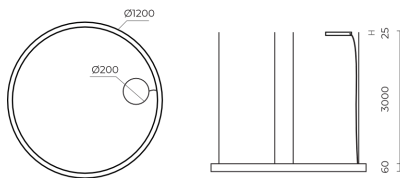

### Light distribution

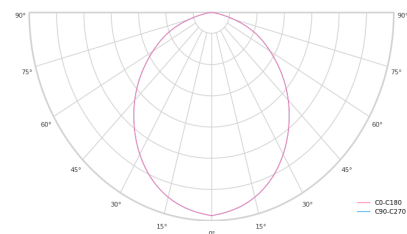

**Available cable colors**

