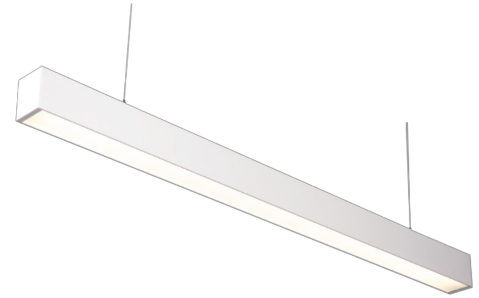


# Technical datasheet

## BASICSUS-1500-840-2-PD-WH

### Product description

Basic linear led luminaire for offices, meeting rooms, corridors and households.

**LED**    220-240 V    IP20            CCT    CRI  
 50-60 Hz    4000 k    80+

### Product technical data

Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Plug-in terminal
Dimming type	DALI
IP rating	20
Protection class	I
Ambient temperature	0 to +25 °C
Light source	LED
Colour temperature	4000k
Color rendering index	80
Rated luminous flux	3,896 lm
Connected load	31.62 W
Luminous efficacy	123.2 lm/W

Optical system	Lenses
Optical part material	PC
Housing material	Aluminium
Surface finish	Powder coated
Width	50.00 cm
Height	70.00 cm
Length	1,500.00 cm
Weight	2.00 kg
Service lifetime (L80 B30)	50 000 h
Warranty	3 years

### Dimensions



l 1500 mm  
 w 50 mm  
 h 73 mm

### Light distribution

