

# Technical datasheet

## HEXSUS-1800-S-930-1-BL-




### Product description

The design of the luminaire returns to the power of the basic geometric shapes of the hexagon. By combining several diameters, it is possible to achieve different configurations and lighting scenarios with a great visual impact on the interior.


**LED** 220-240 V 50-60 Hz **IP20**  **CE** **CCT 3000 k** **CRI 90+**

### Product technical data


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Plug-in terminal
Dimming type	Non-dimmable
IP rating	20
Protection class	I
Ambient temperature	0 to +25 °C
Light source	LED
Colour temperature	3000k
Color rendering index	90
Rated luminous flux	4,195 lm
Connected load	44.06 W
Luminous efficacy	95.2 lm/W

Ripple	1 %
Inrush current	37 A
Inrush time	188 μs
Optical system	Diffuser
Optical part material	PMMA
Housing material	Aluminium
Surface finish	Powder coated
Width	1,800.00 cm
Height	70.00 cm
Length	1,800.00 cm
Weight	10.00 kg
Service lifetime (L80 B10)	50 000 h
Warranty	5 years

### Dimensions



### Light distribution

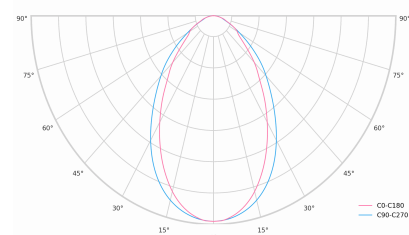

**Available cable colors**

