

ARLI


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Plug-in terminal
Dimming type	DALI
Protection description	20
Protection class	I
Ambient temperature	0°C - 30°C
The suspended linear LED luminaire with LED source with high efficiency up to 165 lm/W. Available in lengths and 4 power color temperature (3000K-6500K) with CRI 80-90+. Five light distribution and 30° beam available. Ideal for commercial premises, offices, warehouses with demanding visual tasks. 5-year warranty.	
Connected load	25.18 W
Luminous efficacy	154.3 lm/W

Ripple	1 %
DALI address	1
Inrush current	6 A
Inrush time	800 µs
Optical system	Lenses
Optical part material	PMMA
Housing material	Aluminium
Surface finish	Powder coated
Width	62.00 cm
Height	57.00 cm
Length	1,000.00 cm
Weight	1.40 kg
Service lifetime (L80 B10)	60 000 h
Warranty	5 years

Light distribution

This system compensates for the depreciation of luminous flux to avoid excess lighting at the beginning of the installation's service life. Luminous depreciation over time must be taken into account to ensure a predefined lighting level during the luminaire's useful life.

Without a CLO feature, this simply means increasing the initial power upon installation in order to make up for luminous depreciation. By precisely controlling the luminous flux, the energy needed to reach the required level can be maintained throughout the luminaire's life.

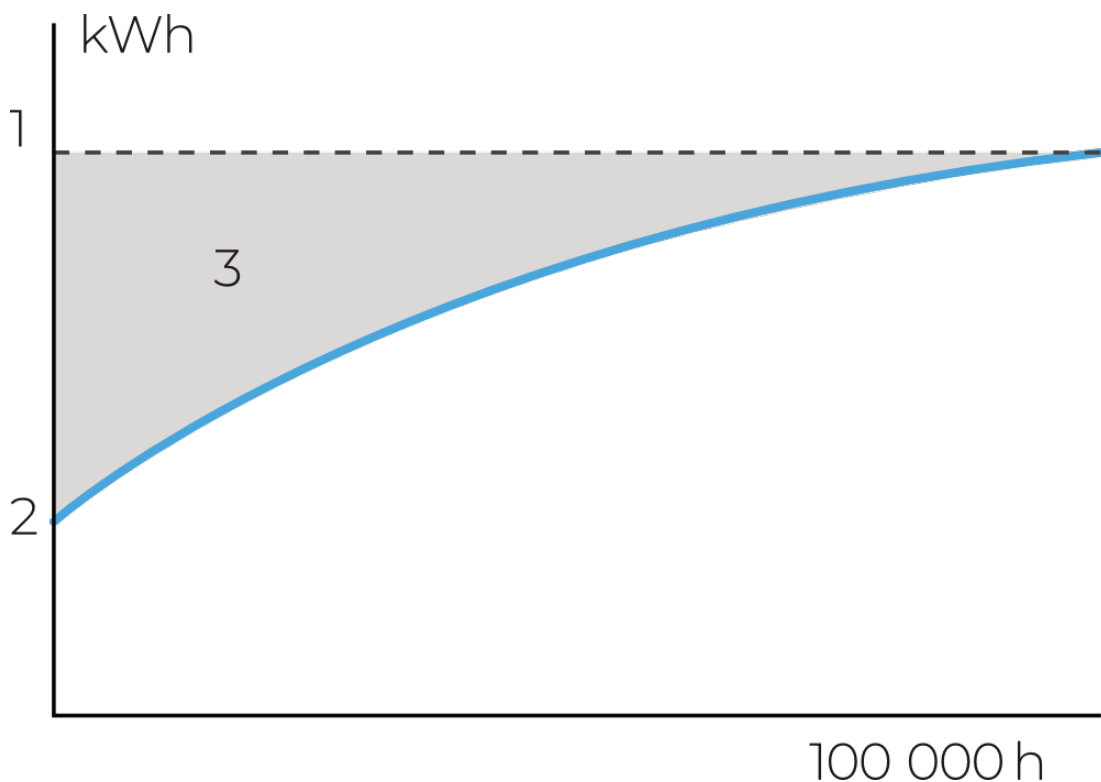

- A. Dimming level
B. Time
DALI 2

DALI (Digital Addressable Lighting Interface) is an international standard for digital lighting control systems. It enables individual control of each luminaire in the network using digital signals - unlike traditional analog solutions.

Key DALI2 innovations:

Key DALI2 innovations.
Advanced diagnostic capabilities
Better fault reporting and device status
Enhanced scene programming options
Support for RGB/RGBW and tunable white