

# Technical datasheet

## DL-M-830-1



### Product description

Indoor LED recessed mounted downlight with aluminum reflector. With separate LED driver for direct connection to mains voltage




**LED** 220-240 V 50-60 Hz **IP20**   **CCT 3000 k** **CRI 80+**

### Product technical data

Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Screw terminal
Dimming type	Non-dimmable
IP rating	20
Protection class	II
Ambient temperature	0 to +25 °C
Light source	LED
Colour temperature	3000k
Color rendering index	80
Rated luminous flux	2,530 lm
Connected load	22.00 W
Luminous efficacy	115.0 lm/W

Optical system	Diffuser
Optical part material	PMMA
Housing material	Aluminium
Surface finish	Powder coated
Height	35.00 cm
Diameter	185.00 cm
Weight	0.40 kg
Service lifetime (L70 B50)	30 000 h
Warranty	2 years

### Dimensions

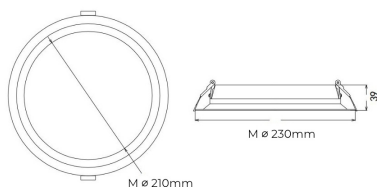

### Light distribution

