

Technical datasheet

DL-M-840-1



Product description

Indoor LED recessed mounted downlight with aluminum reflector. With separate LED driver for direct connection to mains voltage




LED 220-240 V 50-60 Hz **IP20**   **CCT 4000 k** **CRI 80+**

Product technical data

| | | | |
|-----------------------|------------------------|----------------------------|---------------|
| Mains voltage | 220 - 240V AC, 50/60Hz | Optical system | Diffuser |
| Connection method | Screw terminal | Optical part material | PMMA |
| Dimming type | Non-dimmable | Housing material | Aluminium |
| IP rating | 20 | Surface finish | Powder coated |
| Protection class | II | Height | 35.00 cm |
| Ambient temperature | 0 to +25 °C | Diameter | 185.00 cm |
| Light source | LED | Weight | 0.40 kg |
| Colour temperature | 4000k | Service lifetime (L70 B50) | 30 000 h |
| Color rendering index | 80 | Warranty | 2 years |
| Rated luminous flux | 2,530 lm | | |
| Connected load | 22.00 W | | |
| Luminous efficacy | 115.0 lm/W | | |

Dimensions

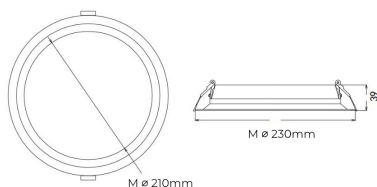

Light distribution

