

# Technical datasheet

## Cross-L-840-2-90



### Product description

High-bay led light created with an emphasis on efficiency and easy installation. Suitable for installation in warehouses and production halls.




**LED**    220-240 V    IP65            CCT    CRI  
 50-60 Hz    4000 k    80+


### Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	DALI address	1
Connection method	Connection cable	Inrush current	100 A
Dimming type	DALI	Optical system	Lenses
IP rating	65	Optical part material	PC
Protection class	I	Housing material	Aluminium
Impact rating	IK 08	Surface finish	Powder coated
Ambient temperature	-25 to 30 °C	Height	142.00 cm
Light source	LED	Diameter	347.00 cm
Colour temperature	4000k	Weight	3.70 kg
Color rendering index	80	Service lifetime (L80 B10)	50 000 h
Rated luminous flux	30,795 lm	Warranty	5 years
Connected load	198.80 W		
Luminous efficacy	154.9 lm/W		

### Dimensions



### Light distribution

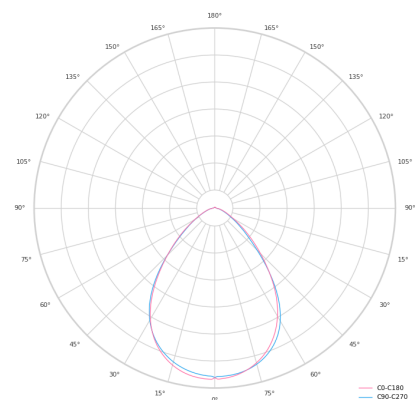

## Optional products

DALI / 1-10V  
converter



Konzola Cross

---