

Family datasheet

Worker track




Product description

Worker Track Duo is a linear LED luminaire for 3-phase track system with LED source with 50,000 hours lifetime. Available in 3 power options, color temperatures 3000K/4000K/5000K with CRI 80+/90+. Five light distribution types (50°, 80°, ASYM, SYM, WAS) with special optics reducing glare and DALI control option available. Provides comfortable and natural lighting with easy track system installation. Ideal for offices and stores. 5-year warranty.


LED 220-240 V 50-60 Hz IP20    UGR < 19

Technical description


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	3-phase track adapter
IP rating	20
Protection class	II
Light source	LED
Switching type	Non-dimmable , DALI
CRI	80, 90
CCT	3000K, 4000K, 5000K
Lumen output	2180-6015 lm
Efficiency	Up to 144 lm/W
Power consumption	22-51 W

Optical system	Lenses
Optical part material	PMMA
Housing material	Aluminium
Surface finish	Powder coated
Ambient temperature	0 to +25°C
Service lifetime (L80 B10)	50 000h
Warranty	5 years

Dimensions

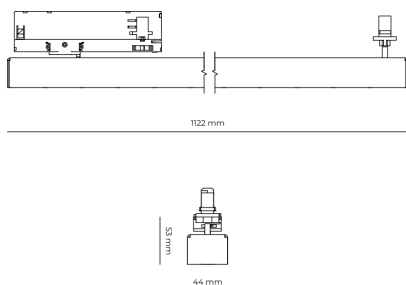

Light distribution curves

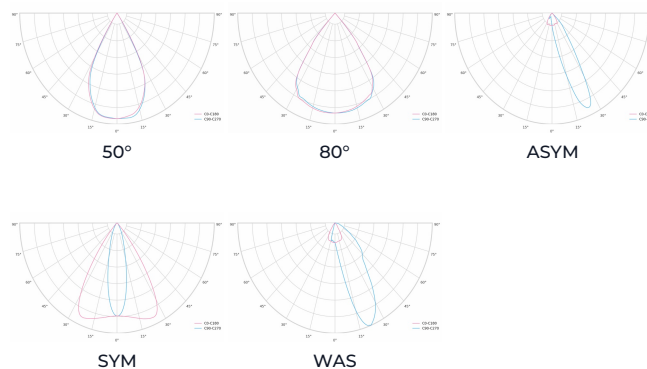

Available housing colors



RAL 9005



RAL 9003

Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: WORT-L-830-1-50-BL

Attribute	Value	Code
Model	Worker track	WORT-
Version	S	S
	M	M
	L	L
CCT	3000k (CRI 80+)	830
	3000k (CRI 90+)	930
	4000k (CRI 80+)	840
	4000k (CRI 90+)	940
	5000k (CRI 80+)	850
	5000k (CRI 90+)	950
Dimming	Non-dimmable	1
	DALI	2
Light distribution	50°	50
	80°	80
	ASYM	ASYM
	SYM	SYM
	WAS	WAS
Housing Color	Black	BL
	White	WH