

Family datasheet

LINE Surface



Product description

LINE Surface is an elegant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser for uniform light. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. DALI control option available. Ideal for offices and commercial spaces. 5-year warranty.




LED 220-240 V 50-60 Hz IP20  

Technical description


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Plug-in terminal
IP rating	20
Protection class	I
Light source	LED
Switching type	Non-dimmable , DALI
CRI	80, 90
CCT	3000K, 4000K
Lumen output	621-7389 lm
Efficiency	Up to 107 lm/W
Power consumption	8-79 W

Optical system	Diffuser
Optical part material	PMMA
Housing material	Aluminium
Surface finish	Powder coated
Ambient temperature	0 to +25°C
Service lifetime (L80 B10)	50 000h
Warranty	5 years

Dimensions

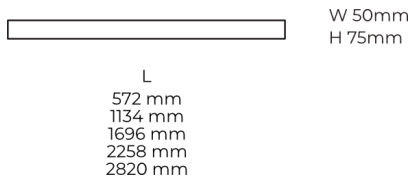

Light distribution curves



Available housing colors



Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **LINESUR-1134-L-830-1-BL**

Attribute	Value	Code
Model	LINE Surface	LINESUR-
Size	572	572
	1134	1134
	1696	1696
	2258	2258
	2820	2820
Version	S	S
	M	M
	L	L
	XL	XL
CCT	3000k (CRI 80+)	830
	3000k (CRI 90+)	930
	4000k (CRI 80+)	840
	4000k (CRI 90+)	940
Dimming	Non-dimmable	1
	DALI	2
Housing Color	Black	BL
	White	WH