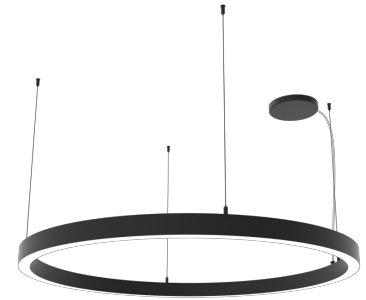


# Family datasheet

## Ring

### Product description

Ring is a circular LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser for uniform light. Available in 3 sizes, color temperatures 3000K/4000K with CRI 80+. Suspended and surface mounting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.


LED 220-240 V 50-60Hz IP20  

### Technical description


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Screw terminal
IP rating	20
Protection class	I
Light source	LED
Switching type	Non-dimmable , DALI
CRI	80
CCT	3000K, 4000K
Lumen output	3344-7125 lm
Efficiency	Up to 95 lm/W
Power consumption	38-75 W

Optical system	Diffuser
Optical part material	PMMA
Housing material	Aluminium
Surface finish	Painted
Ambient temperature	0 to +25°C
Service lifetime (L80 B10)	50 000h
Warranty	5 years

### Dimensions

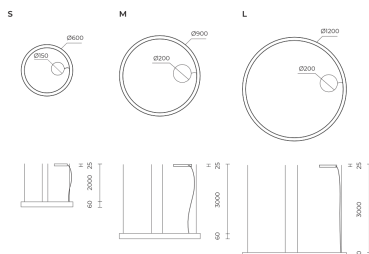

### Light distribution curves



**Available housing colors**



RAL 9005



RAL 9003

---

**Available cable colors**



0111



0900



8765



7953



3119



4867



4906



5305



2166



4406



3358



5474



5744



1257



3119z



0900z



5305z

## Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **Ring-L-830-1-SUR-BL-**

Attribute	Value	Code
Model	Ring	Ring-
Version	S	S
	M	M
	L	L
CCT	3000k (CRI 80+)	830
	4000k (CRI 80+)	840
Dimming	Non-dimmable	1
	DALI	2
Montáž	Závesné	SUS
	Prisadené	SUR
Housing Color	Black	BL
	White	WH
Cable Color	White	0111
	Black	0900
	Gray	8765
	Brown	7953
	Red	3119
	Blue	4867
	Light blue	4906
	Cyan	5305
	Orange	2166
	Purple	4406
	Pink	3358
	Green	5474
	Dark green	5744
	Yellow	1257
	Red/white	3119z
Black/white	0900z	
Cyan/white	5305z	