

# Family datasheet

## LINE Suspended



### Product description

LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.


LED 220-240 V 50-60Hz IP20  

### Technical description


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Plug-in terminal
IP rating	20
Protection class	I
Light source	LED
Switching type	Non-dimmable , DALI
CRI	80, 90
CCT	3000K, 4000K
Lumen output	621-13562 lm
Efficiency	Up to 117 lm/W
Power consumption	8-131 W

Optical system	Diffuser
Optical part material	PMMA
Housing material	Aluminium
Surface finish	Powder coated
Ambient temperature	0 to +25°C
Service lifetime (L80 B10)	50 000h
Warranty	5 years

### Dimensions

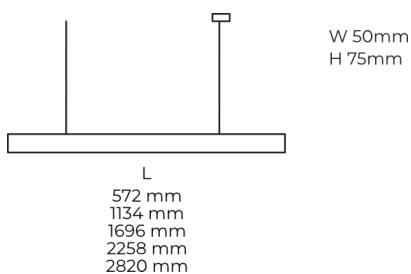

### Light distribution curves



### Available housing colors



**Available cable colors**



## Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **LINESUS1134-L-830-1-BL-DI-**

Attribute	Value	Code
Model	LINE Suspended	LINESUS
Size	572	572
	1134	1134
	1696	1696
	2258	2258
	2820	2820
Version	S	S
	M	M
	L	L
	XL	XL
CCT	3000k (CRI 80+)	830
	3000k (CRI 90+)	930
	4000k (CRI 80+)	840
	4000k (CRI 90+)	940
Dimming	Non-dimmable	1
	DALI	2
Housing Color	Black	BL
	White	WH
Light Emission	Direct	DI
	Indirect	DI/IND
Cable Color	White	0111
	Black	0900
	Gray	8765
	Brown	7953
	Red	3119
	Blue	4867
	Light blue	4906
	Cyan	5305
	Orange	2166
	Purple	4406
	Pink	3358
	Green	5474
	Dark green	5744
	Yellow	1257
	Red/white	3119z
Black/white	0900z	
Cyan/white	5305z	