

# Family datasheet

DLR1

ARLI



## Product description

DLR1 is a surface-mounted LED luminaire with LED source with 30,000 hours lifetime. Available in 3 sizes, color temperatures 3000K/4000K with CRI 80+. Plastic body with PC diffuser for uniform light. Ideal for corridors and residential spaces. 3-year warranty.


LED 220-240 V 50-60 Hz IP20 IP44  

## Technical description


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Plug-in terminal
IP rating	44/20
Protection class	II
Light source	LED
CRI	80
CCT	3000K, 4000K
Lumen output	1710-2375 lm
Efficiency	Up to 142 lm/W
Power consumption	12-25 W

Optical system	Diffuser
Optical part material	PC
Housing material	Plastic
Ambient temperature	0 to +25°C
Service lifetime (L70 B50)	30 000h
Warranty	3 years

## Dimensions

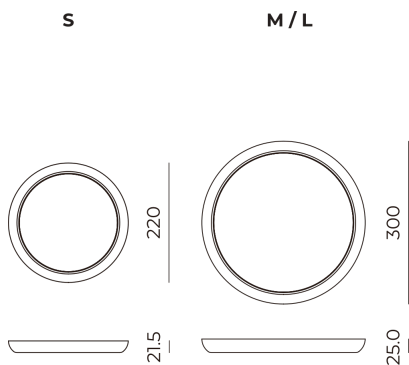

## Light distribution curves



## Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **DLR1-830-L**

Attribute	Value	Code
Model	DLR1	DLR1-
Version	S	S
	M	M
	L	L
CCT	3000k (CRI 80+)	830
	4000k (CRI 80+)	840