

Family datasheet

DL easy



Product description

Indoor LED recessed mounted downlight with aluminum reflector. With separate LED driver for direct connection to mains voltage




LED 220-240 V 50-60 Hz IP20  


Technical description

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Diffuser
Connection method	Screw terminal	Optical part material	PMMA
IP rating	20	Housing material	Aluminium
Protection class	II	Surface finish	Powder coated
Light source	LED	Ambient temperature	0 to +25°C
Switching type	Non-dimmable	Service lifetime (L70 B50)	30 000h
CRI	80	Warranty	2 years
CCT	3000K, 4000K		
Lumen output	1950-2530 lm		
Efficiency	Up to 115 lm/W		
Power consumption	17-22 W		

Dimensions

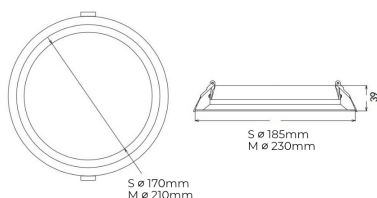

Light distribution curves



Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **DL-M-830-1**

Attribute	Value	Code
Model	DL easy	DL-
Version	S	S
	M	M
CCT	3000k (CRI 80+)	830
	4000k (CRI 80+)	840
Dimming	Non-dimmable	1