

Technical datasheet

Recon-S-750



Product description

Recon is an ideal solution for most outdoor applications such as wall mounted around building facades, gardens, paths near to buildings, garages, entrance ways and drives.



LED

220-240 V
50-60 Hz

IP66

CE


CCT
5000 k

CRI
70+


Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Inrush current	90 A
Connection method	Connection cable	Optical system	Lenses
IP rating	66	Optical part material	Hardened glass
Protection class	I	Housing material	Die-cast aluminium
Ambient temperature	-30 to +35 °C	Surface finish	Powder coated
Light source	LED	Width	204.00 cm
Colour temperature	5000k	Height	53.00 cm
Color rendering index	70	Length	232.00 cm
Rated luminous flux	4,138 lm	Weight	1.10 kg
Connected load	28.58 W	Service lifetime (L80 B10)	35 000 h
Luminous efficacy	144.8 lm/W	Warranty	3 years

Dimensions

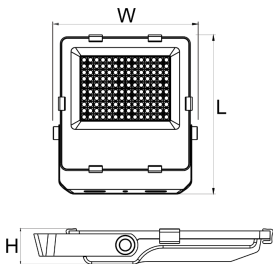

Light distribution

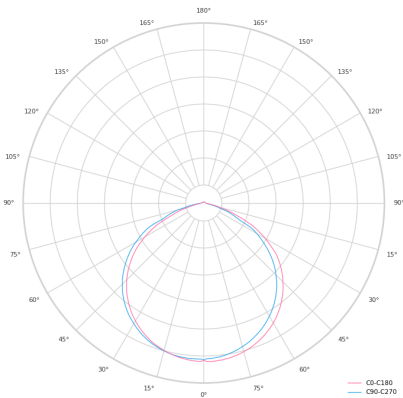

Optional products

Recon sensor

