

# Technical datasheet

## WOR-L-930-2-SYM-BL



### Product description


Modern recessed lamp with excellent lighting properties. Suitable for lighting offices, corridors and design spaces. The lamp uses the most modern LED technology, which makes the lamp powerful and economical.

**LED**    220-240V 50-60Hz    **IP20**             **UGR < 19**    **CCT 3000 k**    **CRI 90+**    **DIMM Push**


### Product technical data

|                       |                        |                            |               |
|-----------------------|------------------------|----------------------------|---------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz | Ripple                     | 3 %           |
| Connection method     | Screw terminal         | DALI address               | 1             |
| Dimming type          | DALI                   | Inrush current             | 4 A           |
| IP rating             | 20                     | Inrush time                | 46 µs         |
| Protection class      | II                     | Optical system             | Lenses        |
| Ambient temperature   | 0 to +25 °C            | Optical part material      | PMMA          |
| Light source          | LED                    | Housing material           | Steel         |
| Colour temperature    | 3000k                  | Surface finish             | Powder coated |
| Color rendering index | 90                     | Width                      | 71.00 cm      |
| Rated luminous flux   | 1,024 lm               | Height                     | 41.00 cm      |
| Connected load        | 13.24 W                | Length                     | 340.00 cm     |
| Luminous efficacy     | 77.3 lm/W              | Weight                     | 0.75 kg       |
|                       |                        | Service lifetime (L80 B10) | 50 000 h      |
|                       |                        | Warranty                   | 5 years       |

### Dimensions



### Light distribution

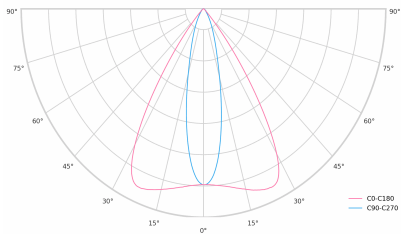

## DALI 2

**DALI** (Digital Addressable Lighting Interface) is an international standard for digital lighting control systems. It enables individual control of each luminaire in the network using digital signals - unlike traditional analog solutions.

**Key DALI2 innovations:**

Advanced diagnostic capabilities  
Better fault reporting and device status  
Enhanced scene programming options  
Support for RGB/RGBW and tunable white