

Technical datasheet

Cross-L-850-4-120



Product description

High-bay led light created with an emphasis on efficiency and easy installation. Suitable for installation in warehouses and production halls.




LED 220-240 V IP65   CCT CRI
 50-60 Hz 5000 k 80+


Product technical data

| | | | |
|-----------------------|------------------------|----------------------------|---------------|
| Mains voltage | 220 - 240V AC, 50/60Hz | Inrush current | 100 A |
| Connection method | Connection cable | Optical system | Lenses |
| Dimming type | 1-10V | Optical part material | PC |
| IP rating | 65 | Housing material | Aluminium |
| Protection class | I | Surface finish | Powder coated |
| Impact rating | IK 08 | Height | 142.00 cm |
| Ambient temperature | -25 to 30 °C | Diameter | 347.00 cm |
| Light source | LED | Weight | 3.70 kg |
| Colour temperature | 5000k | Service lifetime (L80 B10) | 50 000 h |
| Color rendering index | 80 | Warranty | 5 years |
| Rated luminous flux | 30,795 lm | | |
| Connected load | 198.80 W | | |
| Luminous efficacy | 154.9 lm/W | | |

Dimensions



Light distribution

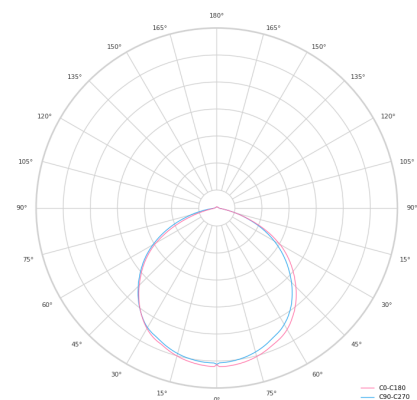

Optional products

DALI /1-10V
converter



Konzola Cross
