

# Technical datasheet

## GEMINYXL-930-1-BL-



### Product description

Geminy linear lamp is designed to create smaller atmospheres within larger spaces. The design features elegant lines and subtle details, along with copper details that complement the structure of the lamp and provide a rich material contrast to powder-coated parts, creating a modern and functional light for any space.

LED

220-240 V  
50-60 Hz

IP20

CE


CCT  
3000 k

CRI  
90+


### Product technical data

|                       |                        |                            |               |
|-----------------------|------------------------|----------------------------|---------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz | Ripple                     | 1 %           |
| Connection method     | Plug-in terminal       | Inrush current             | 17 A          |
| Dimming type          | Non-dimmable           | Inrush time                | 162 µs        |
| IP rating             | 20                     | Optical system             | Diffuser      |
| Protection class      | I                      | Optical part material      | PMMA          |
| Ambient temperature   | 0 to +25 °C            | Housing material           | Steel         |
| Light source          | LED                    | Surface finish             | Powder coated |
| Colour temperature    | 3000k                  | Width                      | 40.00 cm      |
| Color rendering index | 90                     | Height                     | 40.00 cm      |
| Rated luminous flux   | 3,937 lm               | Length                     | 1,800.00 cm   |
| Connected load        | 38.36 W                | Weight                     | 6.00 kg       |
| Luminous efficacy     | 102.6 lm/W             | Service lifetime (L80 B10) | 50 000 h      |
|                       |                        | Warranty                   | 5 years       |

### Dimensions



### Light distribution

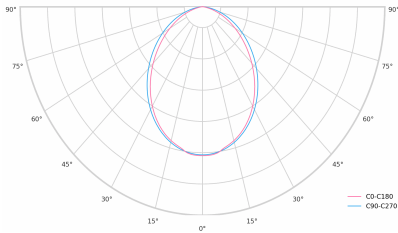

Available cable colors

