

# Technical datasheet

LINESUS1134-L-940-1-WH-DI/IND-



## Product description


LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.

**LED** 220-240 V 50-60 Hz **IP20** **CE** **CCT 4000 k** **CRI 90+**


## Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Ripple	1 %
Connection method	Plug-in terminal	Inrush current	35 A
Dimming type	Non-dimmable	Inrush time	162 μs
IP rating	20	Optical system	Diffuser
Protection class	I	Optical part material	PMMA
Ambient temperature	0 to +25 °C	Housing material	Aluminium
Light source	LED	Surface finish	Powder coated
Colour temperature	4000k	Width	50.00 cm
Color rendering index	90	Height	70.00 cm
Rated luminous flux	2,551 lm	Length	1,134.00 cm
Connected load	52.51 W	Weight	2.80 kg
Luminous efficacy	90.7 lm/W	Service lifetime (L80 B10)	50 000 h
		Warranty	5 years

## Dimensions

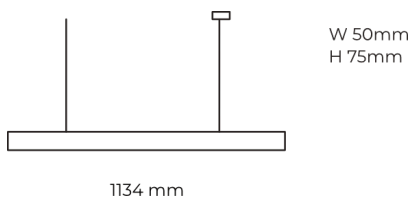

## Light distribution

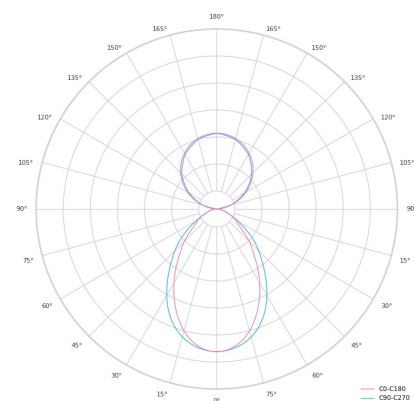

**Available cable colors**

