

# Technical datasheet

LINESUS2258-L-840-1-BL-DI-



## Product description


LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.

**LED** 220-240 V 50-60Hz **IP20** **CCT 4000 k** **CRI 80+**


## Product technical data

|                              |                        |                                   |               |
|------------------------------|------------------------|-----------------------------------|---------------|
| <b>Mains voltage</b>         | 220 - 240V AC, 50/60Hz | <b>Ripple</b>                     | 2 %           |
| <b>Connection method</b>     | Plug-in terminal       | <b>Inrush current</b>             | 18 A          |
| <b>Dimming type</b>          | Non-dimmable           | <b>Inrush time</b>                | 44 μs         |
| <b>IP rating</b>             | 20                     | <b>Optical system</b>             | Diffuser      |
| <b>Protection class</b>      | I                      | <b>Optical part material</b>      | PMMA          |
| <b>Ambient temperature</b>   | 0 to +25 °C            | <b>Housing material</b>           | Aluminium     |
| <b>Light source</b>          | LED                    | <b>Surface finish</b>             | Powder coated |
| <b>Colour temperature</b>    | 4000k                  | <b>Width</b>                      | 50.00 cm      |
| <b>Color rendering index</b> | 80                     | <b>Height</b>                     | 70.00 cm      |
| <b>Rated luminous flux</b>   | 5,912 lm               | <b>Length</b>                     | 2,258.00 cm   |
| <b>Connected load</b>        | 60.01 W                | <b>Weight</b>                     | 5.50 kg       |
| <b>Luminous efficacy</b>     | 98.5 lm/W              | <b>Service lifetime (L80 B10)</b> | 50 000 h      |
|                              |                        | <b>Warranty</b>                   | 5 years       |

## Dimensions

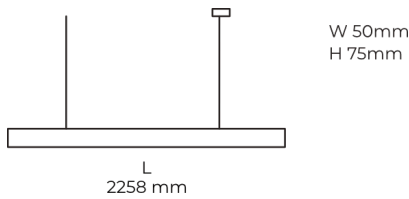

## Light distribution

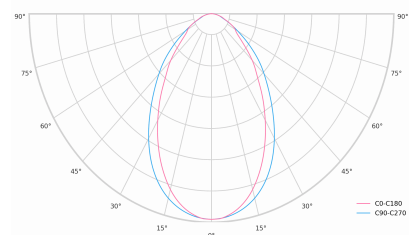

**Available cable colors**

