


# Technical datasheet

## LINESUS2258-L-940-2-WH-DI-



### Product description

LINE Suspended is a pendant linear LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser. Available in 5 sizes (572-2820mm), color temperatures 3000K/4000K with CRI 80+/90+. Direct and indirect lighting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.

**LED**    220-240 V    IP20            CCT    CRI

50-60 Hz


4000 k

90+


### Product technical data

|                       |                        |                            |               |
|-----------------------|------------------------|----------------------------|---------------|
| Mains voltage         | 220 - 240V AC, 50/60Hz | Ripple                     | 1 %           |
| Connection method     | Plug-in terminal       | DALI address               | 1             |
| Dimming type          | DALI                   | Standby power              | 0.50 W        |
| IP rating             | 20                     | Inrush current             | 53 A          |
| Protection class      | I                      | Optical system             | Diffuser      |
| Ambient temperature   | 0 to +25 °C            | Optical part material      | PMMA          |
| Light source          | LED                    | Housing material           | Aluminium     |
| Colour temperature    | 4000k                  | Surface finish             | Powder coated |
| Color rendering index | 90                     | Width                      | 5.00 cm       |
| Rated luminous flux   | 5,101 lm               | Height                     | 7.00 cm       |
| Connected load        | 61.06 W                | Length                     | 225.80 cm     |
| Luminous efficacy     | 83.5 lm/W              | Weight                     | 5.50 kg       |
|                       |                        | Service lifetime (L80 B10) | 50 000 h      |
|                       |                        | Warranty                   | 5 years       |

### Dimensions

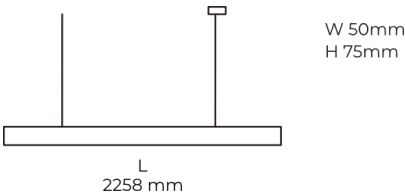

### Light distribution

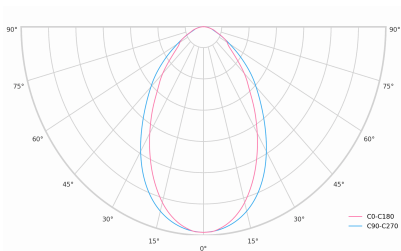

Available cable colors

