

Technical datasheet
Ring-M-830-1-SUS-BL-

RLI



LED

220-240V
50-60Hz

IP20

CE

CCT
3000 k


CRI
80+

Product technical data

Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Screw terminal
Dimming type	Non-dimmable
IP rating	20
Product description	I
Protection class	0 to +25 °C
Ambient temperature	0 to +25 °C
Ring is a circular LED luminaire with high-quality LED source with 50,000 hours	
Rated power	57.00 W
Rated luminous flux	5000 lm
Rated luminous efficacy	88.0 lm/W
Connected load	57.00 W
Luminous efficacy	88.0 lm/W

Optical system
Optical part material
Housing material
Surface finish
Height
Diameter
Weight
Service lifetime (L80 B10)
Warranty

Diffuser
PMMA
Aluminium
Painted
Height
60.00 cm
Diameter
900.00 cm
Weight
7.80 kg
Service lifetime
50 000 h
Warranty
5 years

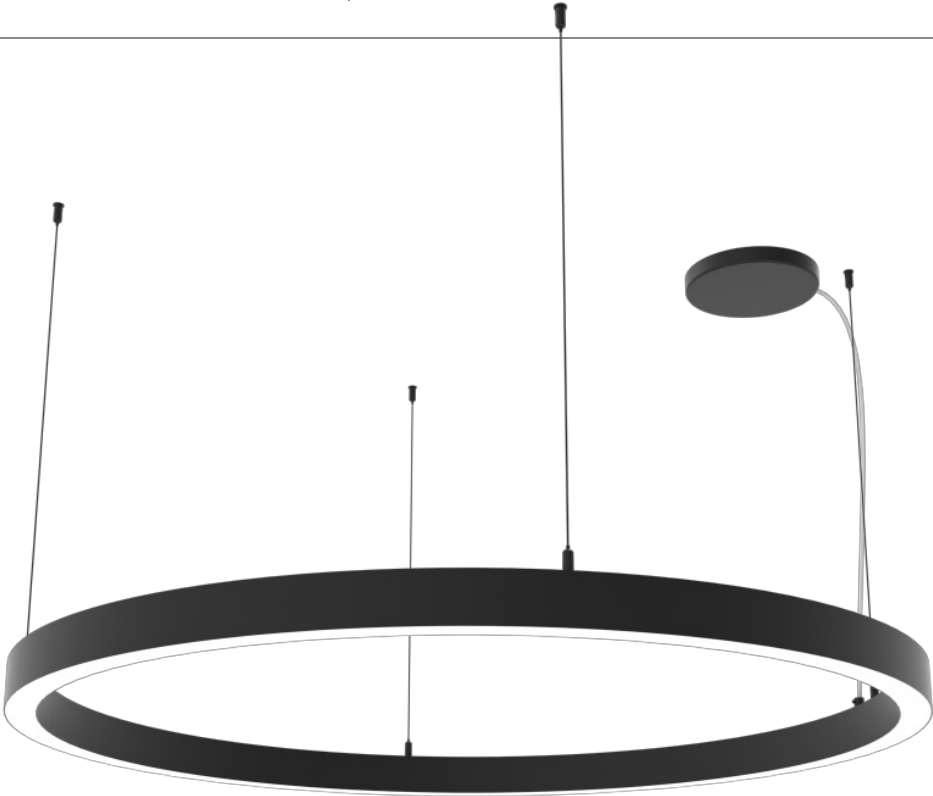

Dimensions	Light distribution
<div></div>	<div></div>

Available cable colors


0111


0900


8765


7953


3119


4867


4906


5305


2166


4406


3358


5474


5744


1257


3119z


0900z


5305z

