

Technical datasheet

Ring-L-840-1-SUS-WH-



Product description

Ring is a circular LED luminaire with high-quality LED source with 50,000 hours lifetime and PMMA diffuser for uniform light. Available in 3 sizes, color temperatures 3000K/4000K with CRI 80+. Suspended and surface mounting options with DALI control available. Wide range of cable colors. Ideal for offices and commercial spaces. 5-year warranty.




LED 220-240 V 50-60 Hz **IP20**  **CE** **CCT 4000 k** **CRI 80+**


Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Diffuser
Connection method	Screw terminal	Optical part material	PMMA
Dimming type	Non-dimmable	Housing material	Aluminium
IP rating	20	Surface finish	Painted
Protection class	I	Height	60.00 cm
Ambient temperature	0 to +25 °C	Diameter	1,200.00 cm
Light source	LED	Weight	12.20 kg
Colour temperature	4000k	Service lifetime (L80 B10)	50 000 h
Color rendering index	80	Warranty	5 years
Rated luminous flux	7,125 lm		
Connected load	75.00 W		
Luminous efficacy	95.0 lm/W		

Dimensions

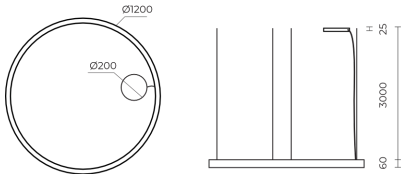

Light distribution

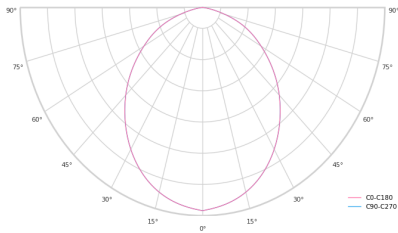

Available cable colors

