


Technical datasheet

BASICSUR-1500-840-1-PD-BL



Product description

Basic linear led luminaire for offices, meeting rooms, corridors and households.

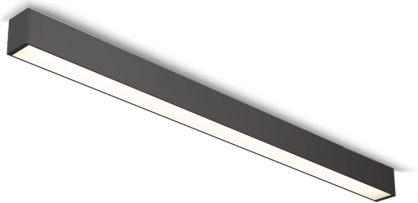

LED

220-240 V
50-60 Hz

IP20

CE


CCT
4000 k

CRI
80+

Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Diffuser
Connection method	Plug-in terminal	Optical part material	PC
Dimming type	Non-dimmable	Housing material	Aluminium
		Surface finish	Powder coated
IP rating	20	Width	50.00 cm
Protection class	I	Height	70.00 cm
Ambient temperature	0 to +25 °C	Length	1,500.00 cm
		Weight	2.00 kg
Light source	LED	Service lifetime (L80 B30)	50 000 h
Colour temperature	4000k	Warranty	3 years
Color rendering index	80		
Rated luminous flux	3,896 lm		
Connected load	31.62 W		
Luminous efficacy	123.2 lm/W		

Dimensions



Light distribution

