# Technical datasheet

## STYSUS-1200-840-1-BL-



### Product description

Stanley Suspended is a large pendant LED luminaire with high-quality LED source with 50,000 hours lifetime. Available in 5 sizes (500-1200mm), color temperature 4000K with CRI 80+. Pendant mounting with DALI control option available. Wide range of cable colors. High luminous flux up to 12,169 lm. Ideal for offices and large commercial spaces. 5-year warranty.

LED | 220-240 V 50-60 Hz | IP20 | CCT 4000 k | CRI 80+

### Product technical data

| | |
|---|---|
| Mains voltage | 220 - 240V AC, 50/60Hz |
| Connection method | Plug-in terminal |
| Dimming type | Non-dimmable |
| IP rating | 20 |
| Protection class | I |
| Ambient temperature | 0 to +25 °C |
| Light source | LED |
| Colour temperature | 4000k |
| Color rendering index | 80 |
| Rated luminous flux | 12,169 lm |
| Connected load | 160.00 W |
| Luminous efficacy | 76.1 lm/W |

| | |
|---|---|
| Optical system | Diffuser |
| Optical part material | PC |
| Housing material | Steel |
| Surface finish | Powder coated |
| Height | 100.00 cm |
| Diameter | 1,200.00 cm |
| Weight | 15.80 kg |
| Service lifetime (L80 B10) | 50 000 h |
| Warranty | 5 years |

### Dimensions




### Light distribution

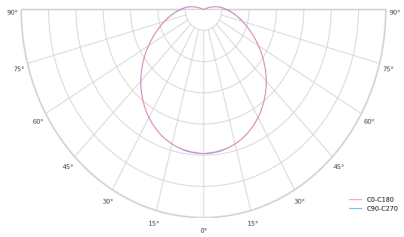

## Available cable colors

