

Technical datasheet

ReconVis-M-840-25



Product description

Recon Vision is a tiltable floodlight for production lines. It lights an assembly spot, a part position or the area a camera captures.

The floodlight mounts on the machine frame and tilts onto the spot that needs light. The optic is selected at order: 10° for small areas, 25° for larger ones. We fit it in production.

The luminaires have low ripple, under 3 % at 100 Hz. That is why vision gets no

LED **220-240V** **50-60Hz** **IP66**  **CE** **DIMM Push** 




Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Ripple	3 %
Connection method	Connection cable	Inrush current	8 A
IP rating	66	Inrush time	33 µs
Protection class	I	Optical system	Lenses
Impact rating	IK 08	Optical part material	Hardened glass
Ambient temperature	-30 to +35 °C	Housing material	Die-cast aluminium
Light source	LED	Surface finish	Powder coated
Rated luminous flux	6,982 lm	Width	243.00 cm
Connected load	57.76 W	Height	53.00 cm
Luminous efficacy	120.9 lm/W	Length	280.00 cm
		Service lifetime (L80 B10)	35 000 h
		Warranty	5 years

Dimensions



Light distribution

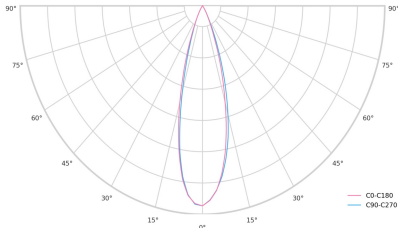

DALI 2

DALI (Digital Addressable Lighting Interface) is an international standard for digital lighting control systems. It enables individual control of each luminaire in the network using digital signals - unlike traditional analog solutions.

Key DALI2 innovations:

Advanced diagnostic capabilities
Better fault reporting and device status
Enhanced scene programming options
Support for RGB/RGBW and tunable white