
Technical datasheet

LINBASSUR-BL-S-840-1

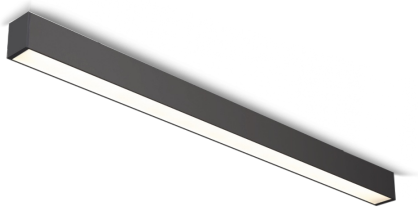

Product description

Linear surface luminaire for offices, classrooms and corridors. Aluminium profile 45 × 75 mm, PC diffuser, white or black finish (RAL 9003 / RAL 9005).


LED | 220-240 V 50-60 Hz | IP20 | CCT 4000 k | CRI 80+

Product technical data

Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Plug-in terminal
IP rating	20
Protection class	I
Ambient temperature	0 to +25 °C
Light source	LED
Colour temperature	4000k
Color rendering index	80
Connected load	24.00 W
Luminous efficacy	117.4 lm/W

Optical system	Diffuser
Optical part material	PC
Housing material	Aluminium
Surface finish	Powder coated
Width	45.00 cm
Height	75.00 cm
Length	1,208.00 cm
Weight	1.60 kg
Service lifetime (L70 B10)	100 000 h
Warranty	5 years

Dimensions

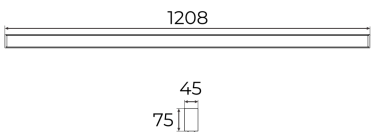

Light distribution

