

Technical datasheet

DL-M-840-1



Product description

Indoor LED recessed mounted downlight with aluminum reflector. With separate LED driver for direct connection to mains voltage



LED

220-240 V
50-60 Hz

IP20


CCT
4000 k

CRI
80+

Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Diffuser
Connection method	Screw terminal	Optical part material	PMMA
Dimming type	Non-dimmable	Housing material	Aluminium
		Surface finish	Powder coated
IP rating	20	Height	35.00 cm
Protection class	II	Diameter	185.00 cm
Ambient temperature	0 to +25 °C	Weight	0.40 kg
Light source	LED	Service lifetime (L70 B50)	30 000 h
Colour temperature	4000k	Warranty	2 years
Color rendering index	80		
Rated luminous flux	2,530 lm		
Connected load	22.00 W		
Luminous efficacy	115.0 lm/W		

Dimensions

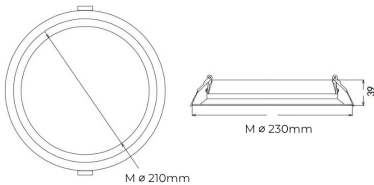

Light distribution

