

Technical datasheet

Cross-S-840-2-90



Product description

High-bay led light created with an emphasis on efficiency and easy installation. Suitable for installation in warehouses and production halls.




LED 220-240 V IP65   CCT CRI
 50-60 Hz 4000 k 80+

Product technical data


| | |
|-----------------------|------------------------|
| Mains voltage | 220 - 240V AC, 50/60Hz |
| Connection method | Connection cable |
| Dimming type | DALI |
| IP rating | 65 |
| Protection class | I |
| Impact rating | IK 08 |
| Ambient temperature | -25 to 30 °C |
| Light source | LED |
| Colour temperature | 4000k |
| Color rendering index | 80 |
| Rated luminous flux | 15,365 lm |
| Connected load | 99.58 W |
| Luminous efficacy | 154.3 lm/W |

| | |
|----------------------------|---------------|
| DALI address | 1 |
| Inrush current | 80 A |
| Optical system | Lenses |
| Optical part material | PC |
| Housing material | Aluminium |
| Surface finish | Powder coated |
| Height | 139.00 cm |
| Diameter | 258.00 cm |
| Weight | 2.00 kg |
| Service lifetime (L80 B10) | 50 000 h |
| Warranty | 5 years |

Dimensions



Light distribution

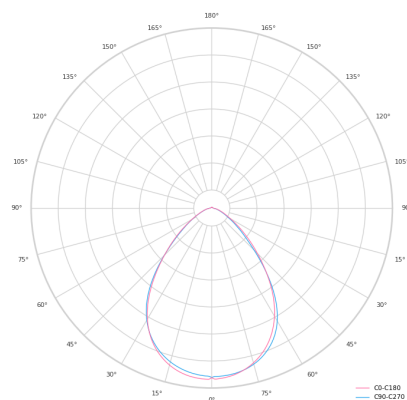

Optional products

DALI /1-10V
converter



Konzola Cross
