

Technical datasheet

Cross-M-840-1-60



Product description

High-bay led light created with an emphasis on efficiency and easy installation.
Suitable for installation in warehouses and production halls.




LED 220-240 V 50-60 Hz **IP65**  **CE** **CCT 4000 k** **CRI 80+**


Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Inrush current	100 A
Connection method	Connection cable	Optical system	Lenses
Dimming type	Non-dimmable	Optical part material	PC
IP rating	65	Housing material	Aluminium
Protection class	I	Surface finish	Powder coated
Impact rating	IK 08	Height	139.00 cm
Ambient temperature	-25 to 30 °C	Diameter	299.00 cm
Light source	LED	Weight	2.70 kg
Colour temperature	4000k	Service lifetime (L80 B10)	50 000 h
Color rendering index	80	Warranty	5 years
Rated luminous flux	23,197 lm		
Connected load	150.60 W		
Luminous efficacy	154.0 lm/W		

Dimensions



Light distribution

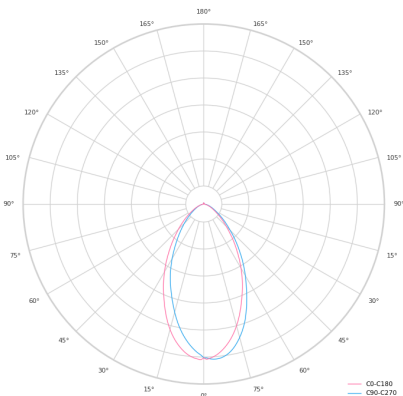

Optional products

DALI / 1-10V
converter



Konzola Cross