
Family datasheet

Base Line 20 suspended

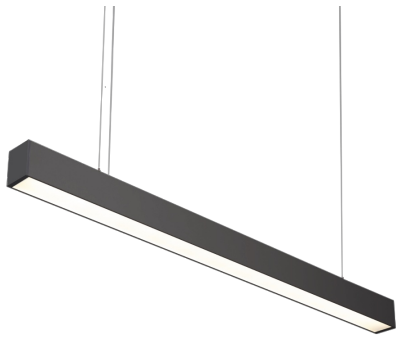

Product description

Linear pendant luminaire for offices, classrooms and corridors. Aluminium profile 45 × 75 mm, PC diffuser, white or black finish (RAL 9003 / RAL 9005).


LED 220-240 V 50-60 Hz IP20

Technical description


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Plug-in terminal
IP rating	20
Protection class	I
Light source	LED
Switching type	Non-dimmable
CRI	80
CCT	4000K
Lumen output	2818-4650 lm
Efficiency	Up to 117 lm/W
Power consumption	24-39 W

Optical system	Diffuser
Optical part material	PC
Housing material	Aluminium
Surface finish	Powder coated
Ambient temperature	0 to +25°C
Service lifetime (L70 B10)	100 000h
Warranty	5 years

Dimensions

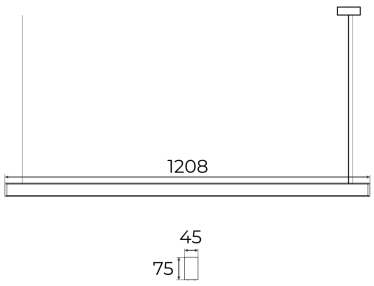

Light distribution curves



Default

Available housing colors



RAL 9005 RAL 9003

Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **LINBASSUS-BL-L-1-840**

Attribute	Value	Code
Model	Base Line 20 suspended	LINBASSUS-
Housing Color	Black	BL
	White	WH
Version	S	S
	M	M
	L	L
Dimming	Non-dimmable	1
CCT	4000k (CRI 80+)	840