

Family datasheet

Base Line 20 surface



Product description

Linear surface luminaire for offices, classrooms and corridors. Aluminium profile 45 × 75 mm, PC diffuser, white or black finish (RAL 9003 / RAL 9005).

LED

220-240 V
50-60 Hz


IP20

CE


Technical description

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Diffuser
Connection method	Plug-in terminal	Optical part material	PC
IP rating	20	Housing material	Aluminium
Protection class	I	Surface finish	Powder coated
Light source	LED	Ambient temperature	0 to +25°C
Switching type	Non-dimmable	Service lifetime (L70 B10)	100 000h
CRI	80	Warranty	5 years
CCT	4000K		
Lumen output	2818-4650 lm		
Efficiency	Up to 117 lm/W		
Power consumption	24-39 W		

Dimensions

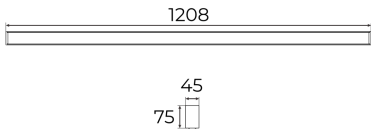

Light distribution curves



Available housing colors



Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: LINBASSUR-BL-L-840-1

Attribute	Value	Code
Model	Base Line 20 surface	LINBASSUR-
Housing Color	Black	BL
	White	WH
Version	S	S
	M	M
	L	L
CCT	4000k (CRI 80+)	840
Dimming	Non-dimmable	1