

Family datasheet

Worker



Product description

Modern recessed lamp with excellent lighting properties. Suitable for lighting offices, corridors and design spaces. The lamp uses the most modern LED technology, which makes the lamp powerful and economical.




LED 220-240 V 50-60 Hz **IP20**    **UGR < 19**


Technical description

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Lenses
Connection method	Screw terminal	Optical part material	PMMA
IP rating	20	Housing material	Steel
Protection class	II	Surface finish	Powder coated
Light source	LED	Ambient temperature	0 to +25°C
Switching type	Non-dimmable , DALI	Service lifetime (L80 B10)	50 000h
CRI	80, 90	Warranty	5 years
CCT	2700K, 3000K, 3500K, 4000K		
Lumen output	669-1535 lm		
Efficiency	Up to 122 lm/W		
Power consumption	8-13 W		

Dimensions



Light distribution curves

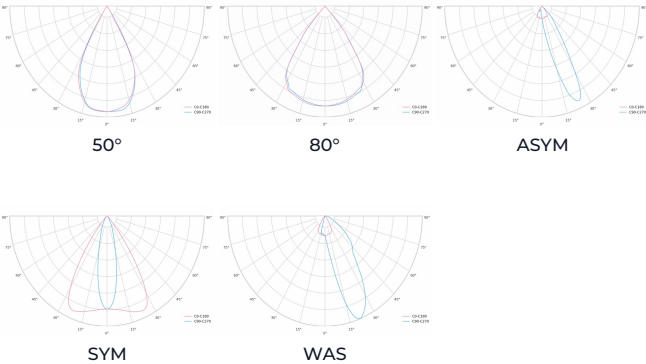

Available housing colors



Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **WOR-L-830-I-50-BL**

Attribute	Value	Code
Model	Worker	WOR-
Version	S	S
	M	M
	L	L
CCT	2700k (CRI 90+)	927
	3000k (CRI 80+)	830
	3000k (CRI 90+)	930
	3500k (CRI 90+)	935
	4000k (CRI 80+)	840
	4000k (CRI 90+)	940
Dimming	Non-dimmable	1
	DALI	2
Light distribution	50°	50
	80°	80
	ASYM	ASYM
	SYM	SYM
	WAS	WAS
Housing Color	Black	BL
	White	WH