

Family datasheet

Cross



Product description

High-bay led light created with an emphasis on efficiency and easy installation.
Suitable for installation in warehouses and production halls.



LED


220-240 V
50-60 Hz

IP65


Technical description

Mains voltage	220 - 240V AC, 50/60Hz	Optical system	Lenses
Connection method	Connection cable	Optical part material	PC
IP rating	65	Housing material	Aluminium
Protection class	I	Surface finish	Powder coated
Impact rating	IK 08	Ambient temperature	-25 to 30°C
Light source	LED	Service lifetime (L80 B10)	50 000h
Switching type	Non-dimmable , DALI , 1-10V	Warranty	5 years
CRI	80		
CCT	4000K, 5000K		
Lumen output	15365-30795 lm		
Efficiency	Up to 154 lm/W		
Power consumption	99-198 W		

Dimensions



Light distribution curves

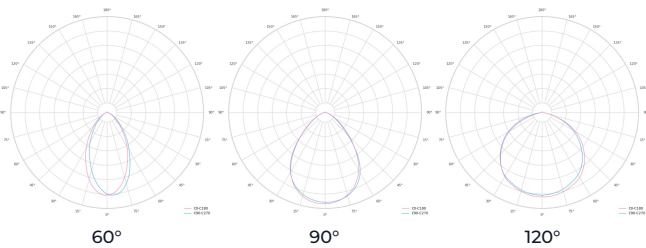

Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **Cross-L-840-1-120**

Attribute	Value	Code
Model	Cross	Cross-
Version	S	S
	M	M
	L	L
CCT	4000k (CRI 80+)	840
	5000k (CRI 80+)	850
Dimming	Non-dimmable	1
	DALI	2
	1-10V	4
Light distribution	60°	60
	90°	90
	120°	120

Optional products



DALI / 1-10V
converter



Konzola Cross