Family datasheet

Industry 3 suspended



Product description

High-bay led light created with an emphasis on efficiency and easy installation.
Suitable for installation in warehouses and production halls.

LED 220-240V 50-60Hz IP65

Technical description

Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Connection cable
IP rating	65
Protection class	I
Impact rating	IK 08
Light source	LED
Switching type	Non-dimmable , DALI
CRI	80
CCT	4000K, 5000K
Lumen output	10741-32224 lm
Efficiency	Up to 170 lm/W
Power consumption	65-196 W

Optical system	Lenses
Optical part material	PC
Housing material	Aluminium
Surface finish	Powder coated
Ambient temperature	-25 to +30°C
Service lifetime (L80 B10)	>100 000 h
Warranty	7 years

Dimensions


S
l 320 mm
w 92 mm
h 100 mm

L
l 320 mm
w 192 mm
h 100 mm


M
l 320 mm
w 192 mm
h 100 mm

XL
l 320 mm
w 296 mm
h 100 mm

Light distribution curves

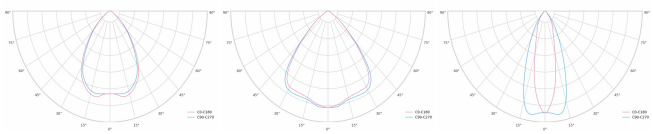

75° 90° HR



WHR

Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: **INDSUSP3-L-840-1-75**

Attribute	Value	Code
Model	Industry 3 suspended	INDSUSP3-
Version	S	S
	M	M
	L	L
	XL	XL
CCT	4000k (CRI 80+)	840
	5000k (CRI 80+)	850
Dimming	Non-dimmable	1
	DALI	2
Light distribution	75°	75
	90°	90
	HR	HR
	WHR	WHR

Optional products

Reťazový záves
Industry