

# Family datasheet

## Area G3



### Product description

Area G3 is an ideal solution for most outdoor applications such as wall mounted around building facades, gardens, paths near to buildings, garages, entrance ways and drives.




**LED** 220-240 V 50-60 Hz IP66  

### Technical description


Mains voltage	220 - 240V AC, 50/60Hz
Connection method	Connection cable
IP rating	66
Protection class	I
Impact rating	IK 08
Light source	LED
Switching type	Non-dimmable , DALI
CRI	80
CCT	4000K, 5000K
Lumen output	14088-35289 lm
Efficiency	Up to 176 lm/W
Power consumption	100-200 W

Optical system	Lenses
Optical part material	Hardened glass
Housing material	Die-cast aluminium
Surface finish	Powder coated
Ambient temperature	-30 to +35°C
Service lifetime (L80 B10)	50 000h
Warranty	5 years

### Dimensions



### Light distribution curves

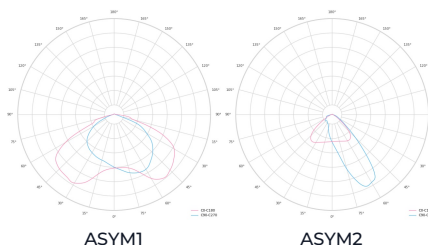

## Product codes

The technical specifications of the luminaire are determined through the combination of these attributes, which result in a unique product code.

Order code example: AREA-L-840-1-ASYM2

Attribute	Value	Code
Model	Area G3	AREA-
Version	S	S
	M	M
	L	L
CCT	4000k (CRI 80+)	840
	5000k (CRI 80+)	850
Dimming	Non-dimmable	1
	DALI	2
Light distribution	ASYM1	ASYM1
	ASYM2	ASYM2