

Technical datasheet


WORCOM-L-830-2-SYM-WH

Product description

Worker Compact is a modern track LED luminaire for 3-phase system with LED source with 50,000 hours lifetime. Available in 3 power options, wide range of color temperatures (2700K-4000K) with CRI 80+/90+. Five light distribution types (50°, 80°, ASYM, SYM, WAS) and DALI control option available. Uses the most modern LED technology for powerful and economical lighting. Ideal for offices, corridors and retail spaces. 5-year warranty.

LED 220-240V 50-60Hz IP20   UGR < 19 CCT 3000 k CRI 80+

Product technical data

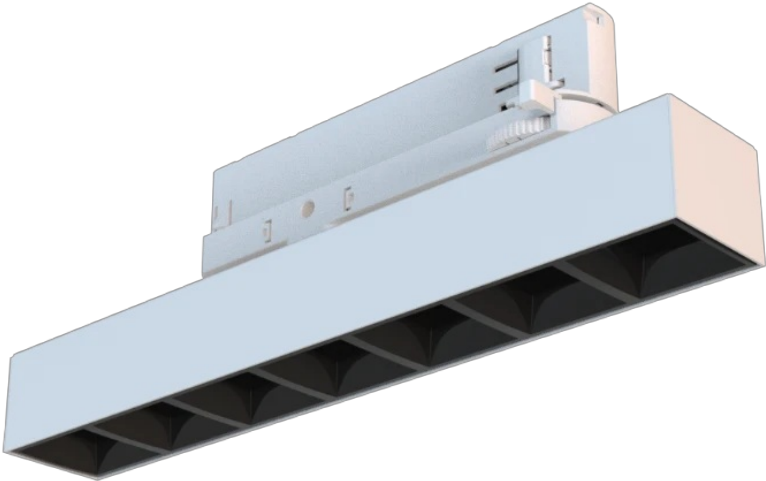

| | | | |
|-----------------------|------------------------|----------------------------|---------------|
| Mains voltage | 220 - 240V AC, 50/60Hz | Ripple | 1 % |
| Connection method | 3-phase track adapter | Optical system | Lenses |
| Dimming type | DALI | Optical part material | PMMA |
| IP rating | 20 | Surface finish | Powder coated |
| Protection class | II | Width | 43.00 cm |
| Ambient temperature | 0 to +25 °C | Height | 37.00 cm |
| Light source | LED | Length | 284.00 cm |
| Colour temperature | 3000k | Weight | 0.45 kg |
| Color rendering index | 80 | Service lifetime (L80 B10) | 50 000 h |
| Rated luminous flux | 1,221 lm | Warranty | 5 years |
| Connected load | 12.82 W | | |
| Luminous efficacy | 95.3 lm/W | | |

| | |
|------------|--------------------|
| Dimensions | Light distribution |
| | |