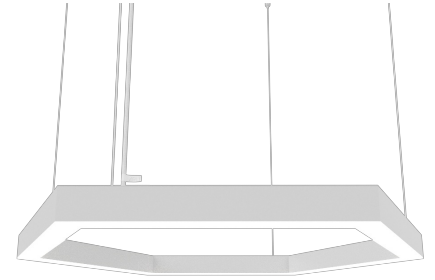


Technical datasheet

HEXSUS-1800-M-940-2-WH-

Product description


The design of the luminaire returns to the power of the basic geometric shapes of the hexagon. By combining several diameters, it is possible to achieve different configurations and lighting scenarios with a great visual impact on the interior.

LED 220-240 V 50-60 Hz **IP20**  **CE** **CCT 4000 k** **CRI 90+**


Product technical data

| | | | |
|-----------------------|------------------------|----------------------------|---------------|
| Mains voltage | 220 - 240V AC, 50/60Hz | Ripple | 1 % |
| Connection method | Plug-in terminal | DALI address | 1 |
| Dimming type | DALI | Standby power | 0.50 W |
| IP rating | 20 | Inrush current | 53 A |
| Protection class | I | Optical system | Diffuser |
| Ambient temperature | 0 to +25 °C | Optical part material | PMMA |
| Light source | LED | Housing material | Aluminium |
| Colour temperature | 4000k | Surface finish | Powder coated |
| Color rendering index | 90 | Width | 1,800.00 cm |
| Rated luminous flux | 5,384 lm | Height | 70.00 cm |
| Connected load | 57.95 W | Length | 1,800.00 cm |
| Luminous efficacy | 92.9 lm/W | Weight | 10.00 kg |
| | | Service lifetime (L80 B10) | 50 000 h |
| | | Warranty | 5 years |

Dimensions



Light distribution

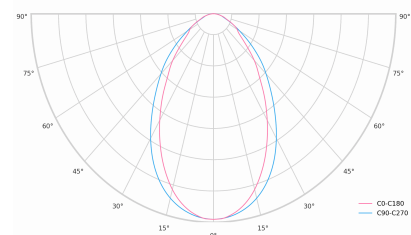

Available cable colors

