

# Technical datasheet

## WOR-L-940-2-ASYM-WH



### Product description

Modern recessed lamp with excellent lighting properties. Suitable for lighting offices, corridors and design spaces. The lamp uses the most modern LED technology, which makes the lamp powerful and economical.



**LED** 220-240V 50-60Hz **IP20**    **UGR < 19** **GCT 4000 k** **CRI 90+** **DIMM Push** 


### Product technical data

Mains voltage	220 - 240V AC, 50/60Hz	Ripple	3 %
Connection method	Screw terminal	DALI address	1
Dimming type	DALI	Inrush current	4 A
IP rating	20	Inrush time	46 µs
Protection class	II	Optical system	Lenses
Ambient temperature	0 to +25 °C	Optical part material	PMMA
Light source	LED	Housing material	Steel
Colour temperature	4000k	Surface finish	Powder coated
Color rendering index	90	Width	71.00 cm
Rated luminous flux	1,094 lm	Height	41.00 cm
Connected load	13.24 W	Length	340.00 cm
Luminous efficacy	82.7 lm/W	Weight	0.75 kg
		Service lifetime (L80 B10)	50 000 h
		Warranty	5 years

### Dimensions



### Light distribution

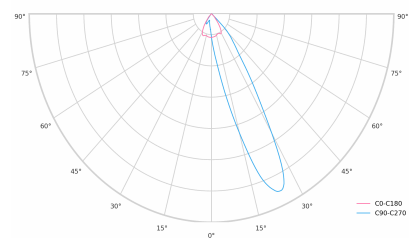

## DALI 2

DALI (Digital Addressable Lighting Interface) is an international standard for digital lighting control systems. It enables individual control of each luminaire in the network using digital signals - unlike traditional analog solutions.

### Key DALI2 innovations:

Advanced diagnostic capabilities  
Better fault reporting and device status  
Enhanced scene programming options  
Support for RGB/RGBW and tunable white