

Technical datasheet

GEMINYM-930-2-WH-




Product description


Geminy linear lamp is designed to create smaller atmospheres within larger spaces. The design features elegant lines and subtle details, along with copper details that complement the structure of the lamp and provide a rich material contrast to powder-coated parts, creating a modern and functional light for any space.

LED 220-240V 50-60Hz **IP20**  **CE** **CCT 3000 k** **CRI 90+** **DIMM Push** **CLO** 


Product technical data

| | | | |
|-----------------------|------------------------|----------------------------|---------------|
| Mains voltage | 220 - 240V AC, 50/60Hz | Ripple | 1 % |
| Connection method | Plug-in terminal | DALI address | 1 |
| Dimming type | DALI | Standby power | 0.50 W |
| IP rating | 20 | Inrush current | 18 A |
| Protection class | I | Inrush time | 180 µs |
| Ambient temperature | 0 to +25 °C | Optical system | Diffuser |
| Light source | LED | Optical part material | PMMA |
| Colour temperature | 3000k | Housing material | Steel |
| Color rendering index | 90 | Surface finish | Powder coated |
| Rated luminous flux | 2,641 lm | Width | 40.00 cm |
| Connected load | 25.79 W | Height | 40.00 cm |
| Luminous efficacy | 102.4 lm/W | Length | 1,200.00 cm |
| | | Weight | 4.00 kg |
| | | Service lifetime (L80 B10) | 50 000 h |
| | | Warranty | 5 years |

Dimensions

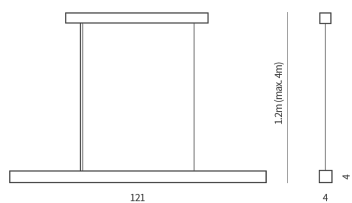

Light distribution

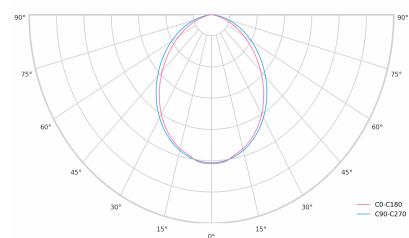

Available cable colors



Constant Light Output (CLO)

This system compensates for the depreciation of luminous flux to avoid excess lighting at the beginning of the installation's service life. Luminous depreciation over time must be taken into account to ensure a predefined lighting level during the luminaire's useful life.

Without a CLO feature, this simply means increasing the initial power upon installation in order to make up for luminous depreciation. By precisely controlling the luminous flux, the energy needed to reach the required level can be maintained throughout the luminaire's life.



A. Dimming level
B. Time

DALI 2

DALI (Digital Addressable Lighting Interface) is an international standard for digital lighting control systems. It enables individual control of each luminaire in the network using digital signals - unlike traditional analog solutions.

Key DALI2 innovations:

- Advanced diagnostic capabilities
- Better fault reporting and device status
- Enhanced scene programming options
- Support for RGB/RGBW and tunable white